


POWER MATE
TECHNOLOGY CO., LTD.
FED20W SERIES

DC-DC CONVERTER



4 : 1 ULTRA WIDE INPUT RANGE
 UP TO 20Watts

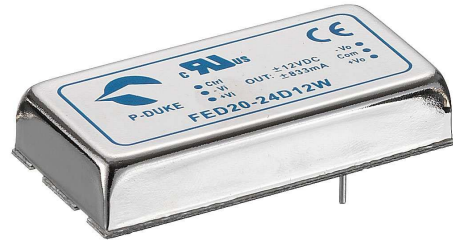

FEATURES

- 1600VDC INPUT TO OUTPUT ISOLATION
- STANDARD 2.00 X 1.00 X 0.40 INCH
- SIX-SIDED CONTINUOUS SHIELD
- UL60950-1, EN60950-1, & IEC60950-1 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

APPLICATIONS

- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT

1600VDC ISOLATION	REMOTE CONTROL	UVP	OCP	SCP	OVP
--------------------------	-----------------------	------------	------------	------------	------------

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load mA	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load (1) µF
FED20-24S3P3W	9 ~ 36	3.3	5500	50	85	18000
FED20-24S05W	9 ~ 36	5	4000	65	88	9600
FED20-24S12W	9 ~ 36	12	1670	22	86	1650
FED20-24S15W	9 ~ 36	15	1330	22	86	1050
FED20-24D05W	9 ~ 36	±5	±2000	55	88	±4800
FED20-24D12W	9 ~ 36	±12	±833	30	87	±825
FED20-24D15W	9 ~ 36	±15	±667	30	87	±525
FED20-48S3P3W	18 ~ 75	3.3	5500	35	85	18000
FED20-48S05W	18 ~ 75	5	4000	35	88	9600
FED20-48S12W	18 ~ 75	12	1670	15	87	1650
FED20-48S15W	18 ~ 75	15	1330	15	87	1050
FED20-48D05W	18 ~ 75	±5	±2000	35	89	±4800
FED20-48D12W	18 ~ 75	±12	±833	17	88	±825
FED20-48D15W	18 ~ 75	±15	±667	17	88	±525

PART NUMBER STRUCTURE

FED20	-	48	S	05	W	-	N	HS
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Remote Control Option	Assembly Option
		24: 9~36 48: 18~75	S: Single	3P3: 3.3 05: 5 12: 12 15: 15	4:1		□: Positive logic N: Negative logic	□: None HS: Heat-sink HC: Heat-sink & Clamp
			D: Dual	05: ±5 12: ±12 15: ±15				

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit	
Operating input voltage range	24Vin(nom)		9	24	36	VDC	
	48Vin(nom)		18	48	75		
Input reflected ripple current			20			mAp-p	
Start up voltage	24Vin(nom)					9	
	48Vin(nom)					18	
Shutdown voltage	24Vin(nom)					7.5	
	48Vin(nom)					15	
Start up time	Constant resistive load	Power up				20	
		Remote ON/OFF				20	
Input surge voltage	100 ms, max.	24Vin(nom)				50	
		48Vin(nom)				100	
Input filter			Pi type				
Remote ON/OFF	Referred to -Vin pin	Positive logic	DC-DC ON				Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC Short or 0 ~ 1.2VDC Open or 3 ~ 12VDC
		(Standard)	DC-DC OFF				
		Negative logic	DC-DC ON				
		(Option)	DC-DC OFF				
		Input current of Ctrl pin					
		Remote off input current		2.5	mA		

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit	
Voltage accuracy			-1.0		+1.0	%	
Line regulation	Low Line to High Line at Full Load	Single	-0.2		+0.2	%	
		Dual	-0.5		+0.5		
Load regulation	No Load to Full Load	Single	-0.5		+0.5	%	
		Dual	-1.0		+1.0		
Cross regulation	Asymmetrical load 25%/100% FL		-5.0		+5.0	%	
Voltage adjustability	Single output		-10		+10	%	
Ripple and noise	20MHz bandwidth With a 0.1μF/50V MLCC	Single				60	
		Dual				3.3Vout	75
						Others All	100
Temperature coefficient			-0.02		+0.02	%/°C	
Transient response recovery time	25% load step change					250	μs
Over voltage protection	Zener diode clamp	3.3Vout				3.9	
		5Vout				6.2	
		12Vout				15	
		15Vout				18	
Over load protection	% of Iout rated					150	%
Short circuit protection						Continuous, automatic recovery	

GENERAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit	
Isolation voltage	1 minute	Input to Output	1600				VDC
		Input (Output) to Case	1600				
Case grounding			Connect case to -Vin with decoupling Y Cap				
Isolation resistance	500VDC		1				GΩ
Isolation capacitance						1500	pF
Switching frequency			360	400	440		kHz
Safety approvals						UL60950-1 EN60950-1 IEC60950-1	
Case material						Nickel-coated copper	
Base material						FR4 PCB	
Potting material						Epoxy (UL94 V-0)	
Weight						27g (0.95oz)	
MTBF	MIL-HDBK-217F, Full load					1.851 x 10 ⁶ hrs	

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating	-40		+66	°C
	With derating	+66		+105	
Maximum case temperature				+105	°C
Storage temperature range		-55		+125	°C
Thermal impedance	Vertical direction by natural convection (20LFM)		12		°C/W
	With heat-sink		10		
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI (2)	EN55022	Class A, Class B
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria B
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient (3)	EN61000-4-4 ±2kV	Perf. Criteria B
Surge (3)	EN61000-4-5 ±1kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

Note:


1. Test by minimum input and constant resistive load.
2. The standard module meets EN55022 Class A and Class B with external components. For further information, please contact with P-DUKE.
3. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V.

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

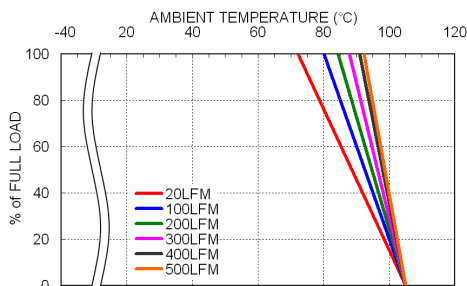


FED20-48S05W Derating Curve

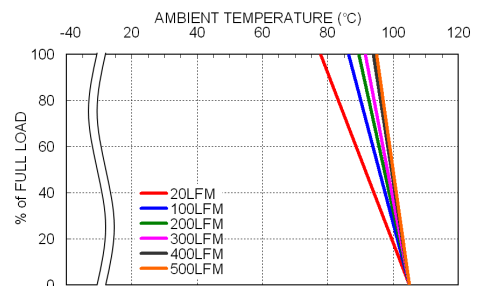

FED20-48S05W Derating Curve With Heat-sink

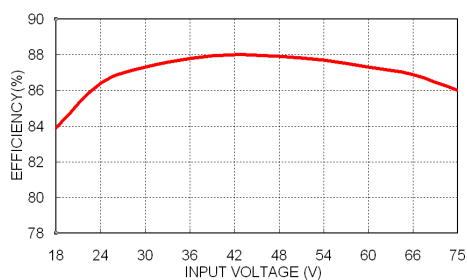


FED20-48S05W Efficiency vs. Input Voltage

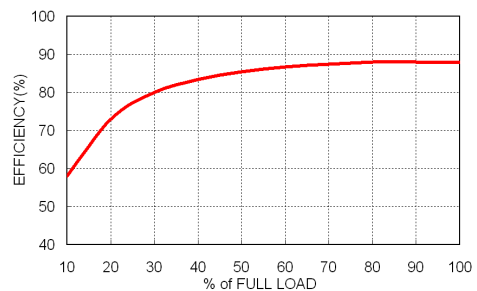

FED20-48S05W Efficiency vs. Output Load

MECHANICAL DRAWING

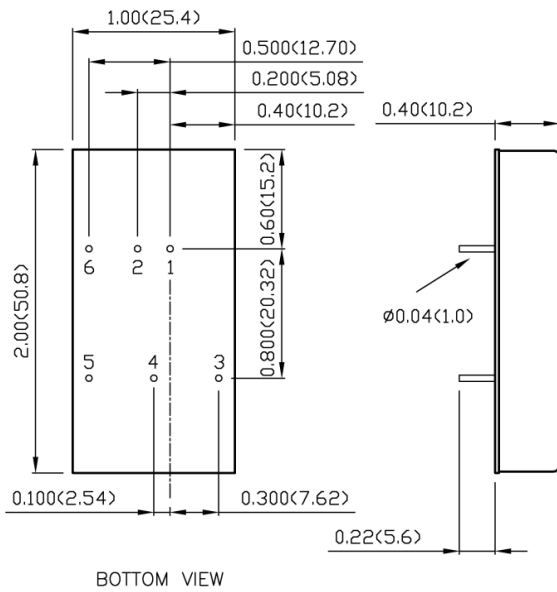


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Ctrl	Ctrl

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.



1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)
x.xxx±0.01 (x.xx±0.25)
3. Pin pitch tolerance ±0.01 (0.25)
4. Pin dimension tolerance ±0.004(0.1)